

## Intercomp CS™ 200



### Standard Features

- Lightweight and compact
- Digital calibration
- Auto shut-off
- lb/kg selectable
- Peak hold feature

### Specifications

**RESOLUTION:**

12 bit A/D delivers more than 1 million internal counts

**CONTROLS:**

Zero, lb/kg, on/off

**DISPLAY:**

0.5" (12 mm) 5-digit LCD

**POWER:**

One 9V disposable alkaline dry cells (or rechargeable nickel-cadmium cells, not included) Battery life is one year of normal use

**DIMENSIONS:**

3.75" W x 2" D x 6" H  
(94 mm W x 50 mm D x 150 mm H)

**ENCLOSURE:**

Weatherproof ABS plastic case

**APPROVALS:**

CE

**AUTO SHUT-OFF:**

Low battery, or after 5 minutes without use

**ACCURACY:**

±0.1% of applied load

**TEMPERATURE:**

Operating -4°F to 140°F  
(-20°C to 60°C)

**NOMINAL OVERLOAD:**


200% of capacity

**MAXIMUM OVERLOAD:**

500% of capacity

**WARRANTY:**

One-year limited warranty

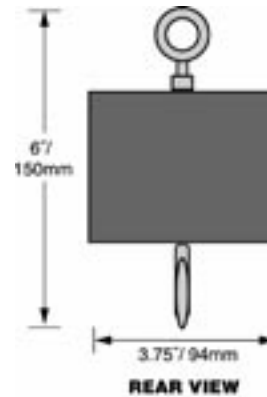

REAR VIEW



SIDE VIEW

PART #	CAPACITY	GRADUATION	EST. SHIP WEIGHT
<b>CS200</b>			
43734	25 lb (12.5 kg)	0.01 lb (0.01 kg)	2 lb
43735	50 lb (25 kg)	0.02 lb (0.01 kg)	2 lb
43736	100 lb (50 kg)	0.05 lb (0.02 kg)	2 lb
43737	250 lb (125 kg)	0.1 lb (0.05 kg)	2 lb
82444	500 lb (250 kg)	0.2 lb (0.1 kg)	2 lb

Specifications subject to change without notice